BIKE LANES · MULTIPURPOSE SPORT FLOORS

Precoat
367-43 Neutral

Pure acrylic latex based neutral topcoat

COLOUR
Neutral
Light brownish · tintable

1.20 g/cm³	61 %	28–37	30 min	0.300 kg/m²
Density (approx.)	Solids content (wt.)	Gloss (60°)	Touch dry	Theor. consumption

Product description

PRECOAT 367-43 NEUTRAL is a fast drying, smooth topcoat for concrete or asphalt surfaces. Recommended for bike lanes, multipurpose acrylic sport floors and all outdoor & indoor temporary areas such as concert halls and exhibition areas. Suitable for light traffic.

Product characteristics

- 100 % pure acrylic latex based, fine quartz filled topcoat for sport flooring applications.
- Neutral base – tinted on site with Unica pigment pastes.

Advantages

- Neutral – tint with desired colorants
- Fast drying
- Perfect flexibility
- Easy mixing on site, less stock
- Smooth finish
- High UV resistance
- High abrasion resistance
- Cost-effective

Position in the system

Line marking
OVERLINE 367-F

Colour coat — THIS PRODUCT
PRECOAT 367-43 NEUTRAL

Primer
ACRYLIC PRIMER 367-28

Sub-base
Asphalt / concrete

Bike lanes · sport floors

Concrete / asphalt · indoor & outdoor · light traffic

unica | Boytem
BOYTEM BOYA VE KİMYA SANAYİ TİCARET LİMİTED ŞİRKETİ
Factory: Gümüşova OSB 1. Sk. No:4 İç Kapı No:1 Gümüşova / Düzce – TÜRKİYE
T +90 216 304 03 05 · F +90 216 304 12 15
unicaboya.com · info@unicaboya.com

Technical data (at +20 °C)

Colour	**Light brownish (neutral)**
Mass density (approx.)	**1.20 g/cm³**
Solids content (by weight)	**61 %**
Gloss (60°)	**28–37**
Touch dry	**30 min**

Overcoating interval	**minimum 2 h**
Theoretical consumption	**0.300 kg/m² (1 layer)**
Application temperature	**+14 °C to +35 °C**
Shelf life	**12 months**

Application procedure

01

Surface preparation

New asphalt or concrete must cure for 21 days. Repair defects, cracks and depressions, then clean off dust, dirt, mildew, debris and loose material. Repairs must be flush and smooth.

02

Mixing

Add the desired pigment paste and mix with a slow-speed mixer until homogeneous; add water if needed.

03

Application

Apply in 2 layers with roller or airless spray: 0.300 kg/m² per coat.

Mixing ratio (by weight)

75 kg

- **75 kg** — PRECOAT 367-43 NEUTRAL
- **7.5 kg*** — Water*
- **4.5 kg** — Pigment paste

*The amount of water may vary with ambient temperature. In hot weather up to 5 % more water may be added.

Application conditions
+14 °C – +35 °C
Do not apply the material at temperatures below +14 °C or above +35 °C.

Consumption
0.300 kg/m²
Per coat, applied in 2 layers – depending on surface permeability, porosity and quality.

Important: coverage rates may vary depending on the surface porosity, ambient temperature and application technique.

unica | Boytem
BOYTEM BOYA VE KİMYA SANAYİ TİCARET LİMİTED ŞİRKETİ
Factory: Gümüşova OSB 1. Sk. No:4 İç Kapı No:1 Gümüşova / Düzce – TÜRKİYE
T +90 216 304 03 05 · F +90 216 304 12 15
unicaboya.com · info@unicaboya.com

Pigment paste colours

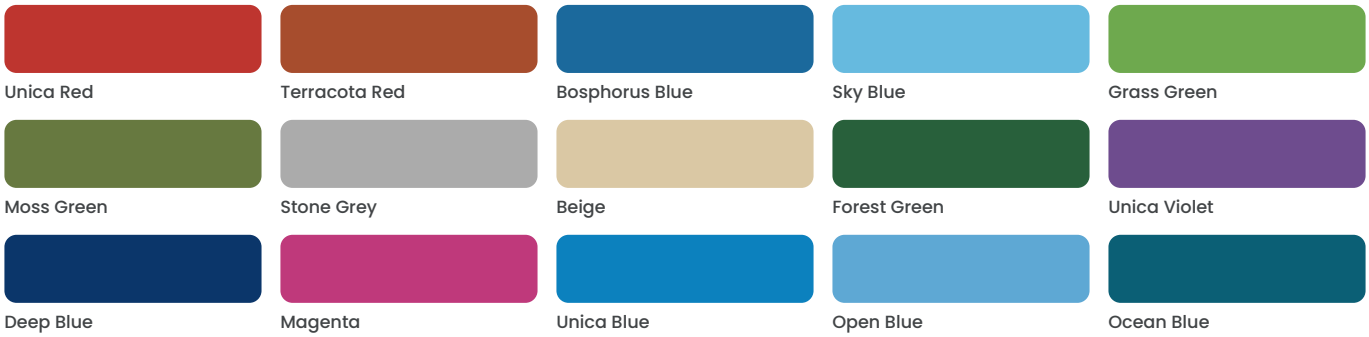

Tint with Unica pigment pastes. Colour chips are indicative only – please refer to the Unica colour card. Special colours on request.

Packaging

- 75 kg polyethylene drums
- 200 kg steel drums

Storage

- Store in sealed drums in an indoor, dry warehouse at +15 °C to +35 °C.
- Shelf life: 12 months from the production date in a cool, dry place.
- Do not leave the product outdoors exposed to the sun.

Safety

- Not classified as hazardous.
- Contains no formaldehyde, asbestos, mercury, lead, chromate or their derivatives.
- Contains fire-retardant additives.
- For safe handling and occupational health & safety see the Safety Data Sheet (SDS).

LEGAL NOTE

The statements made on this technical data sheet are believed to be true and accurate and are intended to provide a guide for approved construction practices. UNICA does not make, nor does it authorise any agent or representative to make, any warranty, express or implied, concerning this material, as workmanship, weather, construction, equipment utilised and other variables affecting results are all beyond our control. UNICA warrants only that the material conforms to product specifications, and any liability to the buyer or user of this product is limited to the replacement value of the product only. In no event shall UNICA be liable for any injury, loss or damage, either direct or incidental, special or consequential, however arising, in connection with material or work performed. UNICA shall not, in any manner, be liable for any defects, variations or change in condition in the substructure over which its products are installed.